



## HYDRODRY AMIFLOW UD

### FOR STUCCO AND PLASTER INSTALLATIONS

AMIFLOW UD Is a vinyl HI-PERFORMANCE trim profile that provides drainage for sill stones, roof pitches, and base of wall applications. The UD features drainage trough for proper Rain Screen Termination and an integrated ground for the proper stucco thickness. The key feature is the vented moisture trough which allows rain screen to be inserted to maintain the drain-age cavity throughout the wall.

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

This bead is required by most building codes in the United States. Check with local building codes for the proper clearance for the weep screed placement above grade.

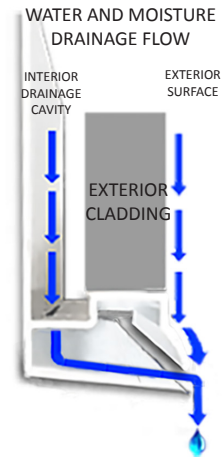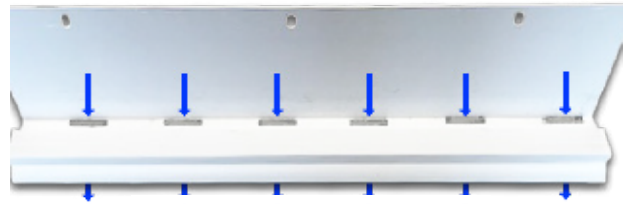

Product Submittal	Product Number	Color
	HDAUDV35078010	White
	HDAUDV35078010G	Gray
	HDAUDV35078010T	Tan
Manufactured with a 3½" Nailing Flange as Required by IBC 2510, 2511		
7/8" Ground		
Standard Length is 10-Feet		

### FINISH

The finish on all AMICO vinyl stucco accessories is compatible with standard lathing and paint finishes.

### COLORS

Standard color is white. This profile can be specified and ordered with the exposed area in tan or gray.



### REFERENCES

PVC complies with ASTM D4316 and ASTM D1784  
 Meets IBC 2510 and IBC 2511  
 Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and accessories.  
 Meets Buy American Procurement Requirements  
 Made in the United States of America  
 LEED: 100% post industrial recyclable content

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ◊ Birmingham, AL 35208 ◊ Telephone 800/366-2642 ◊ Facsimile 205/786-6527

