


## HYDRODRY AMIFLOW DRIP EDGE

FOR STUCCO AND PLASTER INSTALLATIONS

AMIFLOW Drip Edge is a vinyl HI-PERFORMANCE trim profiles provide a straight, true, continuous surface that will drain and ventilate the wall cavity above windows, doors and garage doors. It can also be used in conjunction with the E-Z Vent for a 2 piece Mid-Wall installation. The High Performance trims integrate many features to simplify installation providing guides to help installers maintain the proper stucco thickness. The key feature is the vented moisture trough which allows rain screen to be inserted to maintain the drainage cavity throughout the wall.

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

This bead is required by most building codes in the United States. Check with local building codes for the proper clearance for the weep screed placement above grade.

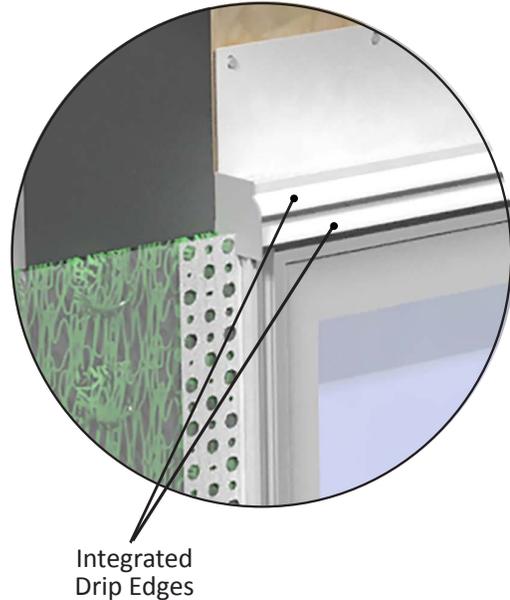

Integrated  
Drip Edges

### COLORS

Standard color is white. This profile can be specified and ordered with the exposed area in tan or gray.



tan



gray

### REFERENCES

PVC complies with ASTM D4316 and ASTM D1784

Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and accessories.

Meets Buy American Procurement Requirements

Made in the United States of America

LEED: 100% post industrial recyclable content

Product Submittal	Product Number	Color
	HDADEV35078010	White
	HDADEV35078010G	Gray
	HDADEV35078010T	Tan
Manufactured with a 3½" Nailing Flange as Required by IBC 2510, 2511		
7/8" Ground		
Standard Length is 10-Feet		

### FINISH

The finish on all AMICO vinyl stucco accessories is compatible with standard lathing and paint finishes.

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

